


Product Specifications

15/25 kV 900A Bushing Extender

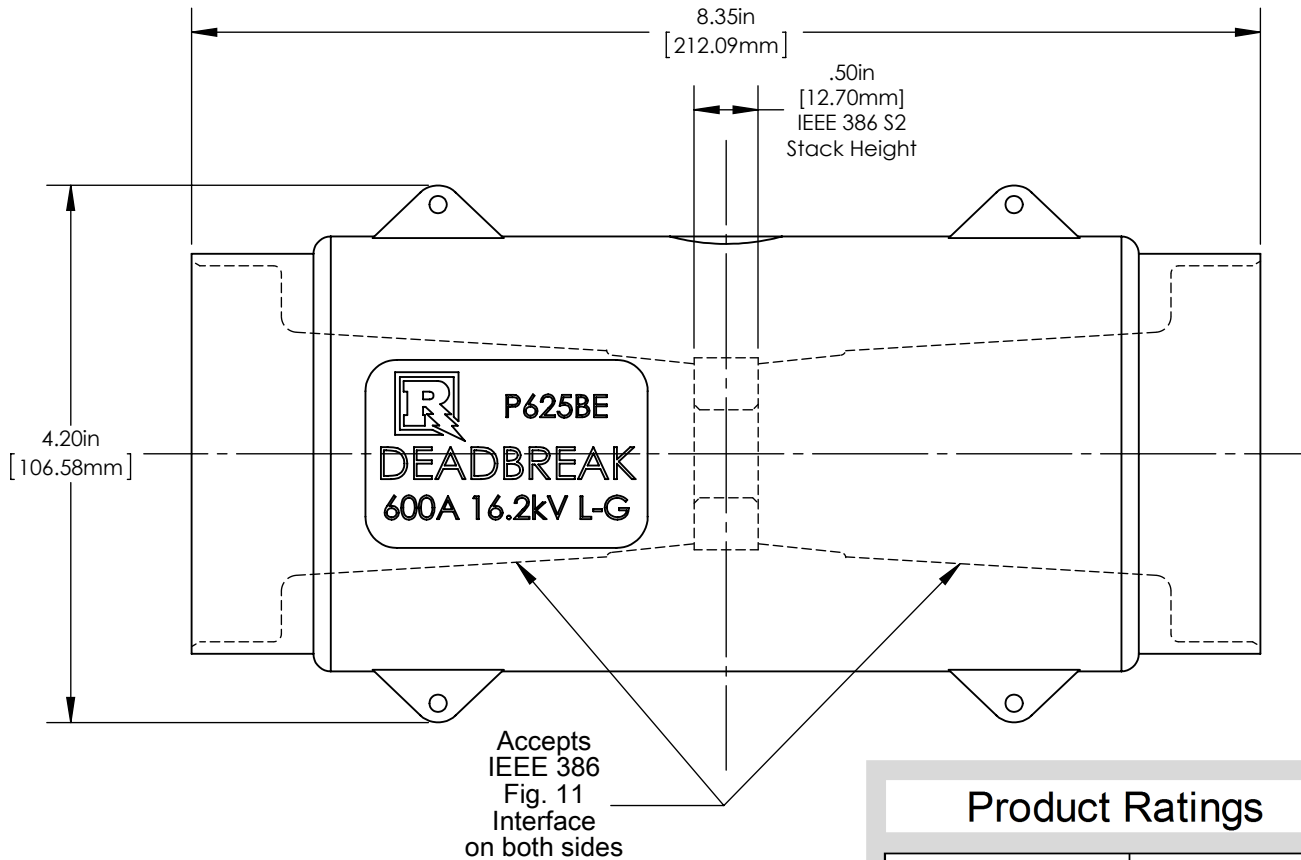

Richards 15/25 kV 900A Bushing Extender (P925BE) provides an insulated, fully shielded connection between an apparatus bushing and another 900A interface connection.

It can be used for spacing purposes as well as for accommodating other 900A accessories.

Product Ratings

Operating Voltage	16.2 kV L-G 28 KV L-L
Impulse Withstand	140 kV BIL
AC Withstand	45 kV
DC Withstand	84 kV
Partial Discharge	22 kV CEV
Momentary	25 kA, 10 cycles
Continuous Current	900 Amp

Richards 15/25 kV 600A Bushing Extender was designed and validated against the following industry standards:

- ANSI/IEEE Std. 386: For Separable Insulated Connector Systems
- ANSI C119.4: For Electric Connectors
- IEEE Std. 592: For Exposed Semiconducting Shields