

15/25/28kV Deadbreak Insulating Plug

Product Data Sheet

The Richards 15/25/28kV Deadbreak Insulating Plug provides a means for insulating a 15/25/28kV Deadbreak Elbow or Bushing Extender. The Insulating Plug has an internal threaded contact that engages a threaded stud. The Deadbreak Insulating Plug is available with an Aluminum (600A) or Copper contact (900A). Each Insulating Plug has a molded-in hex nut used for installation. The hex nut also doubles as a capacitive test point. Included with every Insulating Plug is an EPDM rubber cap that is installed onto the molded-in hex nut.

The HIP-CAP, now available in a low profile design (HIP-CAP-LP), features an eyelet for installation and removal. The new low profile cap reduces stack height, which is important in environments where space is limited.



Features

- Injection Molded Epoxy Composition
- Capacitive Test Point (Hex Nut)
- EPDM Rubber Cap Included

Ordering Information

P625HIP

Aluminum Insulating Plug


P925HIP

Copper Insulating Plug

To order with a factory-installed threaded stud, add "-S" to the part number.

To order with a loose threaded stud, add "-LS" to the part number.

Basic Dimensions

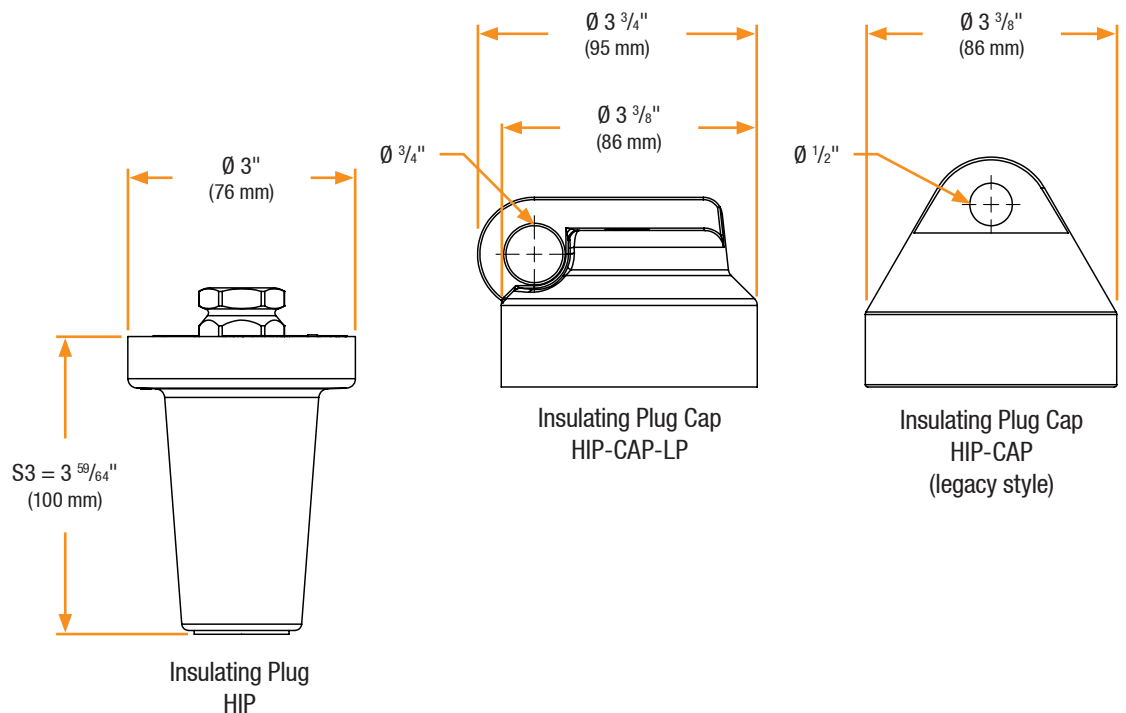

15/25/28kV Deadbreak Insulating Plug

Installation

15/25/28kV Deadbreak Insulating Plug installation is covered by:
RP-II-PLUGWELL

Related Products

P625HIP-STUD

15/25/28kV Aluminum Threaded Stud

P925HIP-STUD

15/25/28kV Copper Threaded Stud

62LCN/62LCT

15/25/28kV Deabreak Elbow

92LCN/92LCT

15/25/28kV Deabreak Elbow

P625IC

15/25/28kV Aluminum Insulating Cap

P925IC

15/25/28kV Copper Insulating Cap

Applications



Outdoor



Vaults



Enclosures



Direct Bury



Submersible

Production Testing

IEEE requires a Partial Discharge test and choice between AC withstand and Impulse.


Richards runs 3/3 tests on **all** Medium Voltage products governed by IEEE 386. [®]

100% Routine Electrical Test:

- Partial Discharge
- AC Withstand
- Impulse Withstand

[®] Exceeds IEEE 386 requirement

Detail View

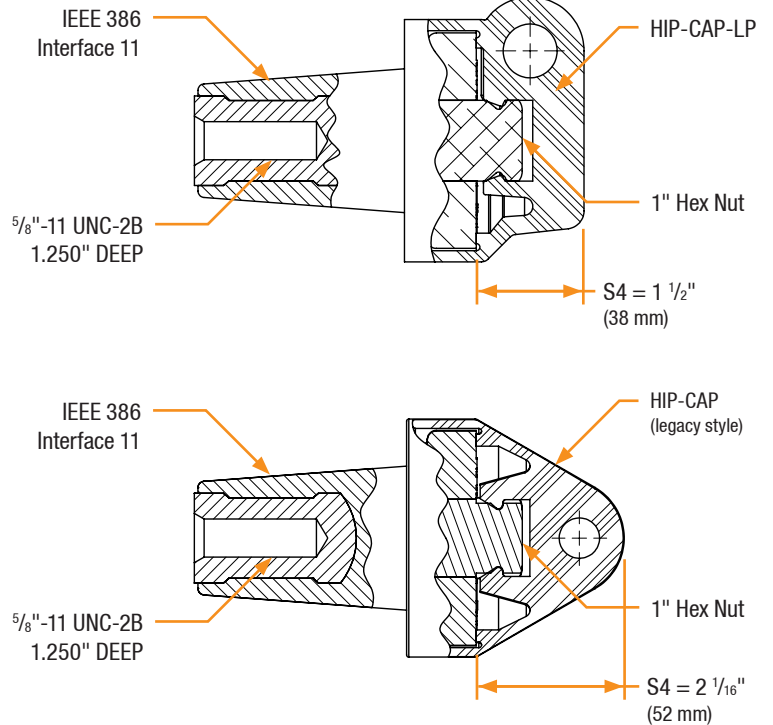

Product Ratings

Voltage Ratings	
Maximum Voltage Rating – (phase to ground)	16.2kV
Corona Voltage Level – (partial discharge extinction voltage)	30kV [®]
AC Withstand – (1 minute)	45kV
Impulse-Withstand Voltage – (BIL)	162kV BIL [®]

Continuous Current Ratings	
Aluminum	600A
Copper	900A

Short-Time Current Ratings	
Aluminum	40kA, 10c. and 10kA, 3s. [®]
Copper	40kA, 10c. and 10kA, 3s.

The 15/25/28kV Deadbreak Insulating Plug is qualified to the following industry standards:

- IEEE Std 386: For Separable Insulated Connector Systems
- ANSI C119.4: For Electric Connectors
- IEEE Std 592: For Exposed Semiconducting Shields