


35kV Cold Shrink Hammerhead

Product Data Sheet

The Richards 35kV Cold Shrink Hammerhead is an innovative Deadbreak Elbow design that eliminates the need for several components and simplifies the installation process. This range-taking design obsoletes the need for a Cable Adapter and features an Integral Jacket Seal.

The CSH Series is molded in the USA from EPDM compounds produced in-house by our polymer production division. The Deadbreak "T-body" is fully-shielded, submersible and available with or without a capacitive test point.


A variety of accessories are available for insulating, testing, grounding and paralleling circuits. The current-rating of the Deadbreak Elbow housing is determined by the metallic components utilized to make the connection. If all-copper components are used, the Deadbreak Elbow assembly has a 900A rating. Otherwise, the assembly is rated for 600A.

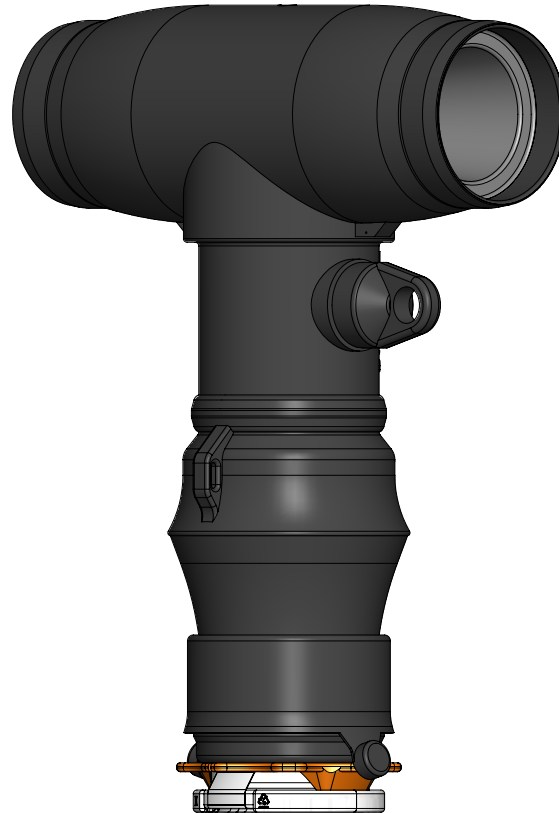

Features

- All-in-One Solution
- Range Taking
- 100% EPDM Composition
- Injection Molded & Peroxide-Cured
- Designed, Molded, and Tested in the USA
- Fully-Shielded/Deadfront
- Optional Capacitive Test Point

Basic Dimensions - Installed on Cable

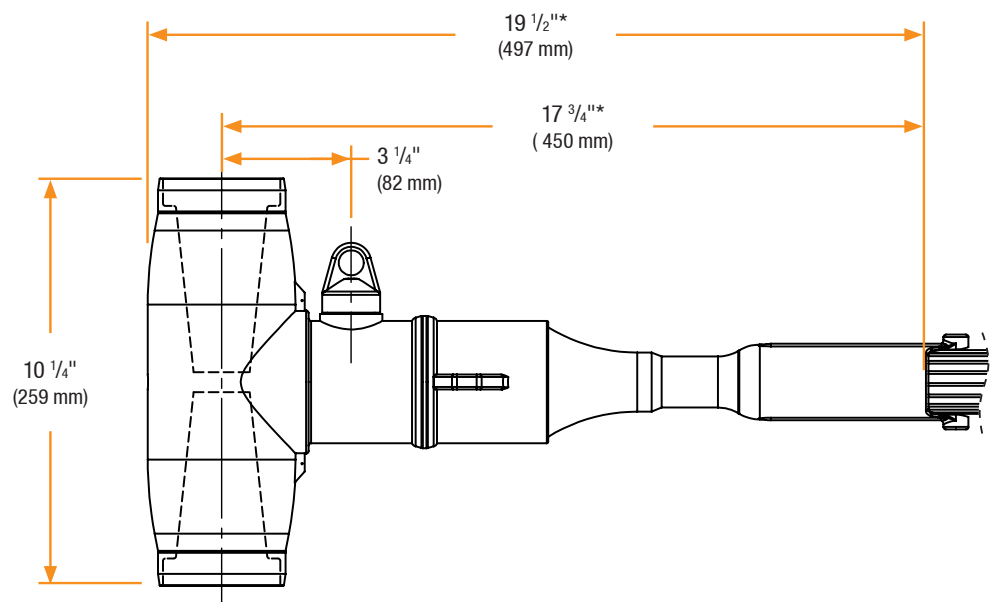

* Approximate length - varies by cable size.

35kV Cold Shrink Hammerhead

Installation

35kV Cold Shrink Hammerhead installation is covered by:
RP-II-35CSH

Related Products

P635HIP-STUD

35kV Aluminum Threaded Stud

P935HIP-STUD

35kV Copper Threaded Stud

P6AL-X

Aluminum Compression Lug

P9CU-X

Copper Compression Lug

P6ALR-X

Aluminum Range Taking Lug

P7ALCU-X

Copper-Top Compression Lug

P635HIP

35kV Aluminum Insulating Plug

P935HIP

35kV Copper Insulating Plug

Production Testing

IEEE requires a Partial Discharge test and choice between AC withstand and Impulse.


Richards runs 3/3 tests on *all* Medium Voltage products governed by IEEE 386.[®]

100% Routine Electrical Test:

- Partial Discharge
- AC Withstand
- Impulse Withstand

[®] Exceeds IEEE 386 requirement

Detail View

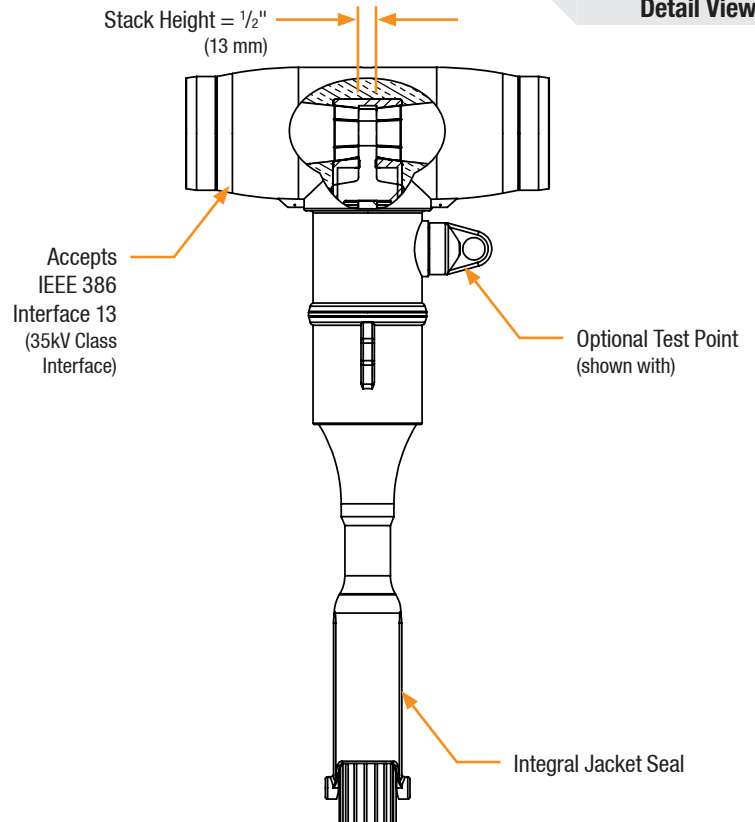

Product Ratings

Voltage Ratings	
Maximum Voltage Rating – (phase to ground)	21.1kV
Corona Voltage Level – (partial discharge extinction voltage)	30kV [®]
AC Withstand – (1 minute)	50kV
Impulse-Withstand Voltage – (BIL)	162kV BIL [®]

Continuous Current Ratings	
Aluminum	600A
Copper	900A

Short-Time Current Ratings	
Aluminum	40kA, 10c. and 10kA, 3s. [®]
Copper	40kA, 10c. and 10kA, 3s.

The 35kV Class CSH is qualified to the following industry standards:

- IEEE Std 386: For Separable Insulated Connector Systems
- ANSI C119.4: For Electric Connectors
- IEEE Std 592: For Exposed Semiconducting Shields